

# CHARGUNG PILE

SK-AC03 .....	01
SK-AC06 .....	02
SK-AC08 .....	03
SK-AC09 .....	04
SK-AC11 .....	05
SK-DC401000D .....	06
SK-20750-SX .....	07
SK-DC20750 .....	08
SK-DC301000 .....	09
SK-DC421000AD .....	10
SK-DC02 .....	11
SK-DC601000 .....	12



# SK-AC03



Identity identification/Over/under voltage protection/Leakage protection/Overcurrent protection  
Temperature control/Flame retardant/Hardware scram/Relay bonding/Input turn-off

## Datasheet

Dimensions: 326\*220\*98(mm)

Charging Type: AC Charging

Output Power: 7KW/7.6KW/11KW/21KW/22KW

Input Voltage: 220V/230V/240V/380V

Output Current: 16A/32A/48A

Rated Frequency: 50Hz~60Hz

Connector Standards: SAE J1772(type-1), IEC 62196-2(type-2)

Cable length: 5m or custom

Start Charging: Tap The RFID Card/Scan Code/APP Control

4G/WIFI: Custom as your needs

Display: 4.3inch LCD Screen+LED Indicator Light

Color: Custom

Installation: Wall mounted or pole mounted

# SK-AC06



**TYPE 2**



**TYPE 1**

Identity  
identification/Over/under  
voltage  
protection/Leakage  
protection/Overcurrent  
protection  
Temperature  
control/Flame  
retardant/Hardware  
scram/Relay  
bonding/Input turn-off

## Datasheet

Dimensions: 330\*190\*87(mm)

Charging Type: AC Charging

Output Power: 7KW/7.6KW/11KW/21KW/22KW

Input Voltage: 220V/230V/240V/380V

Output Current: 16A/32A/48A

Rated Frequency: 50Hz~60Hz

Connector Standards: SAE J1772(type-1), IEC 62196-2(type-2)

Cable length: 5m or custom

Start Charging: Tap The RFID Card/Scan Code/APP Control

4G/WIFI: Custom as your needs

Display: LED Indicator Light

Color: Black, white, or custom

Installation: Wall mounted or pole mounted

# SK-AC08



**TYPE 2**



**TYPE 1**

Identity  
identification/Over/under  
voltage  
protection/Leakage  
protection/Overcurrent  
protection  
Temperature  
control/Flame  
retardant/Hardware  
scram/Relay  
bonding/Input turn-off

## Datasheet

Dimensions: 317\*210\*104(mm)

Charging Type: AC Charging

Output Power: 7KW/7.6KW/11KW/21KW/22KW

Input Voltage: 220V/230V/240V/380V

Output Current: 16A/32A/48A

Rated Frequency: 50Hz~60Hz

Connector Standards: SAE J1772(type-1), IEC 62196-2(type-2)

Cable length: 5m or custom

Start Charging: Tap The RFID Card/Scan Code/APP Control

4G/WIFI: Custom as your needs

Display: 4.3inch LCD Screen+LED Indicator Light

Color: Optional-yellow, blue, green, grey, white

Installation: Wall mounted or pole mounted

# SK-AC09



**TYPE 2**



**TYPE 1**

Identity  
identification/Over/under  
voltage  
protection/Leakage  
protection/Overcurrent  
protection  
Temperature  
control/Flame  
retardant/Hardware  
scram/Relay  
bonding/Input turn-off

## Datasheet

Dimensions: 317\*210\*94(mm)

Charging Type: AC Charging

Output Power: 7KW/7.6KW/11KW/21KW/22KW

Input Voltage: 220V/230V/240V/380V

Output Current: 16A/32A/48A

Rated Frequency: 50Hz~60Hz

Connector Standards: SAE J1772(type-1), IEC 62196-2(type-2)

Cable length: 5m or custom

Start Charging: Tap The RFID Card/Scan Code/APP Control

4G/WIFI: Custom as your needs

Display: LED Indicator Light

Color: Optional-yellow, blue, green, grey, white

Installation: Wall mounted or pole mounted

# SK-AC11



**TYPE 2**



**TYPE 1**

Identity  
identification/Over/under  
voltage  
protection/Leakage  
protection/Overcurrent  
protection  
Temperature  
control/Flame  
retardant/Hardware  
scram/Relay  
bonding/Input turn-off

## Datasheet

Dimensions: 306\*153\*110(mm)

Charging Type: AC Charging

Output Power: 7KW/7.6KW/11KW

Input Voltage: 220V/230V/240V

Output Current: 16A/32A

Rated Frequency: 50Hz~60Hz

Connector Standards: SAE J1772(type-1), IEC 62196-2(type-2)

Cable length: 5m or custom

Start Charging: Tap The RFID Card/Scan Code/APP Control

4G/WIFI: Custom as your needs

Display: 4.3inch LCD Screen+LED Indicator Light

Color: White, green, or custom

Installation: Wall mounted or pole mounted

# SK-DC401000D



Identity identification/Over/under voltage protection/Leakage protection/Overcurrent protection Temperature control/Flame retardant/Hardware scram/Relay bonding/Input turn-off

## Datasheet

Dimensions: 660\*480\*156(mm)

Charging Type: DC charging pile

Output Power: 40KW/60KW

Input Voltage: 220V-1000V

Output Current: 133.3A/200A

Rated Frequency: 50Hz~60Hz

Connector Standards: CCS1, CCS2

Cable length: 5m or custom

Start Charging: Plug&Charger/RFID card

4G/WIFI: Custom as your needs

Display: 7.0inch LCD Screen

Color: Green/Yellow/Red

Installation: Wall mounted or pole mounted

# SK-20750-SX



Identity identification/Over/under voltage protection/Leakage protection/Overcurrent protection Temperature control/Flame retardant/Hardware scram/Relay bonding/Input turn-off

## Datasheet

Dimensions: 600\*410\*156(mm)

Charging Type: DC charging pile

Output Power: 0-20KW

Input Voltage: 200V-1000V

Output Current: 40A

Rated Frequency: 50Hz~60Hz

Connector Standards: CCS1, CCS2

Cable length: 5m or custom

Start Charging: Plug&Charger/RFID card

4G/WIFI: Custom as your needs

Display: 4.3inch LCD Screen

Color: Green/Yellow/Red

Installation: Wall mounted or pole mounted



# SK-DC20750



Identity identification/Over/under voltage protection/Leakage protection/Overcurrent protection Temperature control/Flame retardant/Hardware scram/Relay bonding/Input turn-off

## Datasheet

Dimensions: 600\*410\*156(mm)

Charging Type: DC charging pile

Output Power: 20KW

Input Voltage: 200V-750V

Output Current: 50A

Rated Frequency: 50Hz~60Hz

Connector Standards: CCS1, CCS2

Cable length: 5m or custom

Start Charging: Plug&Charger/RFID card

4G/WIFI: Custom as your needs

Display: 4.3inch LCD Screen

Color: Green/Yellow/Red

Installation: Wall mounted or pole mounted

# SK-DC301000



Identity identification/Over/under voltage protection/Leakage protection/Overcurrent protection Temperature control/Flame retardant/Hardware scram/Relay bonding/Input turn-off

## Datasheet

Dimensions: 660\*480\*156(mm)

Charging Type: DC charging pile

Output Power: 30KW

Input Voltage: 200V-1000V

Output Current: 100A

Rated Frequency: 50Hz~60Hz

Connector Standards: CCS1, CCS2

Cable length: 5m or custom

Start Charging: Plug&Charger/RFID card

4G/WIFI: Custom as your needs

Display: 4.3inch LCD Screen

Color: Green/Yellow/Red

Installation: Wall mounted or pole mounted

# SK-DC421000AD



TYPE2




TYPE1



CCS2



CCS1

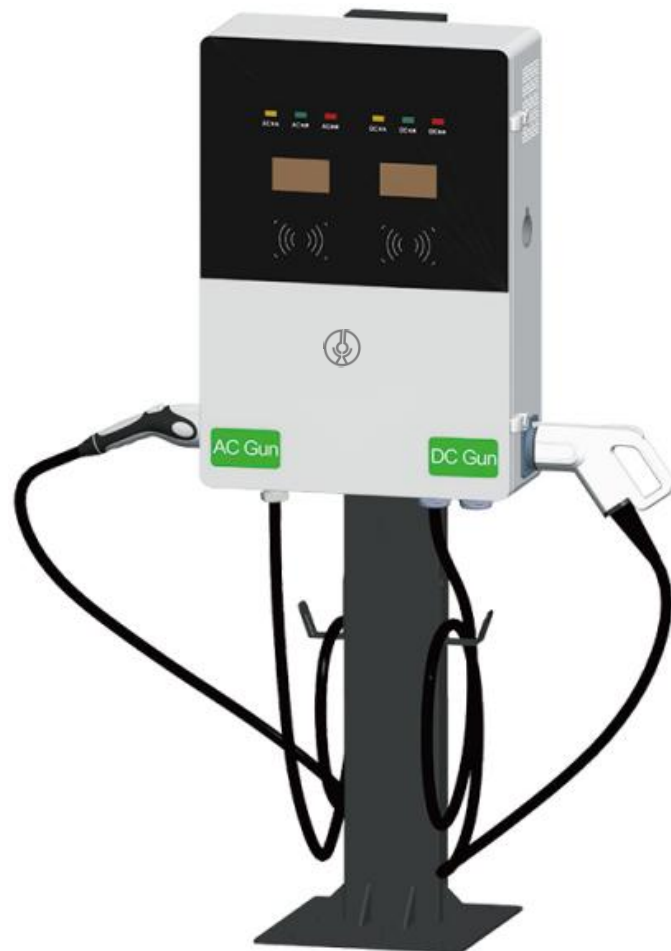

Identity identification/Over/under voltage protection/Leakage protection/Overcurrent protection Temperature control/Flame retardant/Hardware scram/Relay bonding/Input turn-off

## Datasheet

Dimensions: 750\*520\*240(mm)

Charging Type: AC/DC charging pile

Output Power: AC22KW/DC20KW

Input Voltage: 220V-1000V

Output Current: 32A/60A

Rated Frequency: 50Hz~60Hz

Connector Standards: SAE J1772(type-1), IEC 62196-2(type-2)CCS1, CCS2

Cable length: 5m or custom

Start Charging: Plug&Charger/RFID card

4G/WIFI: Custom as your needs

Display: 4.3inch LCD Screen\*2

Color: Green/Yellow/Red

Installation: Wall mounted or pole mounted

# SK-DC02



Over voltage/under voltage protection/leakage protection/short circuit protection/Over current protection/  
Intelligent temperature control/temperature gun detection/hardware emergency stop/lightning protection

## Datasheet

Dimensions: 1600\*700\*525(mm)

Charging Type: DC charging pile

Output Power: 60KW/120KW/180KW

Input Voltage: 380V-400V±15%AC

Output Current: 0A/500A

Rated Frequency: 45Hz~65Hz

Connector Standards: CCS1, CCS2

Cable length: 5m or custom

Start Charging: Enter password/Scan Code/APP Control

4G/WIFI: Custom as your needs

Display: 8inch LCD Screen

Color: Silver or custom

Installation: Floor mounted

# SK-DC601000



CCS2



CCS1



Over voltage/under voltage protection/leakage protection/short circuit protection/Over current protection/  
Intelligent temperature control/temperature gun detection/hardware emergency stop/lightning protection

## Datasheet

Dimensions: 1600\*600\*200(mm)

Charging Type: DC charging pile

Output Power: 60KW/80KW

Input Voltage: 220V-1000V

Output Current: 200A/2500A

Rated Frequency: 50Hz~60Hz

Connector Standards: CCS1, CCS2

Cable length: 5m or custom

Start Charging: Plug&Charger/RFID card

4G/WIFI: Custom as your needs

Display: 7inch LCD Screen

Color: Green/Yellow/Red

Installation: Floor mounted